

## T2350GN9N52.ACWE000/ACWE001



- Energy savings up to 60% (23W for replacing T8 58W X 1)
- Easy installation replacing T8(26) fluorescent lamps
- Wide Beam angle : 180°
- Compatible with existing magnetic ballasts
- Certified by German VDE standardization institute


### Specification



Type	1500mm	EEL	A+
Cover	Frosted	Beam angle (°)	180
Base	G13	Color temperature (K)	5,000
Equivalent to (W)	T8 58W	Color rendering index (Ra)	>80
Wattage (W)	23	Operating temperature (°C)	-10 ~ +40
Lumen output (lm)	2,530	Average lifetime (hrs)	40,000 (L70B10)
Efficacy (lm/W)	110	Dimensions (D x L, mm)	Ø28 x 1499
Voltage (V AC)	220 ~ 240	Weight (g)	274
Frequency (Hz)	50/60	IP / IK Level	-
Input current (mA)	Max. 160	Surge Protection (kV)	< 0.5
Power factor	>0.8	Dimmable	No
THD (%)	< 30	Certification	CE, VDE

※ Specifications are subject to change without notice

### Dimensions

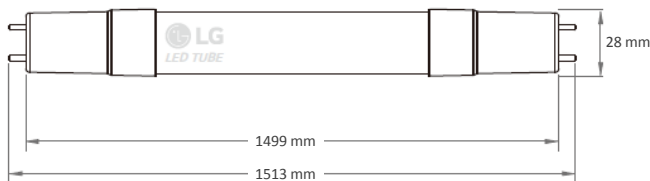

### Photometric Data

